

(1390 REV. 5-93) US DEPT. OF COMMERCE PATENT & TRADEMARK OFFICE  <b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>		ATTORNEY'S DOCKET NUMBER 101850  U.S. APPLICATION NO. (if known, sec 37 C.F.R. 1.5)  <b>09/214519</b>
INTERNATIONAL APPLICATION NO. PCT/JP98/02200	INTERNATIONAL FILING DATE May 19, 1998	PRIORITY DATE CLAIMED May 20, 1997
TITLE OF INVENTION OPTICAL MODULATION ELEMENT AND PROJECTION DISPLAY DEVICE		
APPLICANT(S) FOR DO/EO/US Toshiaki HASHIZUME and Shinji HABA		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> </ol>		
<b>Items 11. to 16. below concern other document(s) or information included:</b>		
<ol style="list-style-type: none"> <li>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.  <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</li> <li>14. <input type="checkbox"/> A substitute specification.</li> <li>15. <input type="checkbox"/> A small entity statement.</li> <li>16. <input checked="" type="checkbox"/> Other items or information: Request for Approval of Drawing Corrections</li> </ol>		

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5)

INTERNATIONAL APPLICATION NO.  
PCT/JP98/02200

ATTORNEY'S DOCKET NUMBER  
101850

17. ☒ The following fees are submitted:

**Basic National fee (37 CFR 1.492(a)(1)-(5)):**

Search Report has been prepared by the EPO or JPO.....\$840.00

International preliminary examination fee paid to USPTO  
(37 CFR 1.482).....\$670.00

No international preliminary examination fee paid to USPTO  
(37 CFR 1.482) but international search fee paid to USPTO  
(37 CFR 1.445(a)(2)).....\$760.00

Neither international preliminary examination fee (37 CFR  
1.482) nor international search fee (37 CFR 1.445(a)(2))  
paid to USPTO.....\$970.00

International preliminary examination fee paid to USPTO  
(37 CFR 1.482) and all claims satisfied provisions of PCT  
Article 33(2)-(4).....\$ 96.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than  
☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR  
1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate		
Total Claims	17 - 20 =	0	X \$ 18.00	\$	
Independent Claims	3 - 3 =	0	X \$ 78.00	\$	
Multiple dependent claim(s)(if applicable)			+ \$260.00	\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$840.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$	
<b>SUBTOTAL =</b>				\$840.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$840.00	
				Amount to be refunded	\$
				Charged	\$

- a. ☒ Check No. 65488 in the amount of \$840.00 to cover the above fees is enclosed.  
b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.  
c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. 15-0461. A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320

NAME: James A. Oliff  
REGISTRATION NUMBER: 27,075

NAME: Thu A. Dang  
REGISTRATION NUMBER: 41,544

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Toshiaki HASHIZUME and Shinji HABA

Application No.: U.S. National Stage of PCT/JP98/02200

Filed: January 7, 1999

Docket No.: 101850

For: OPTICAL MODULATION ELEMENT AND PROJECTION DISPLAY DEVICE

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents  
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE ABSTRACT:

Please amend the Abstract to read:

--Liquid crystal modulation elements (optical modulation elements) are placed so that light outgoing surfaces thereof face light incident surfaces of a color synthesizing prism, respectively. Transparent plates are bonded to the light outgoing surfaces of the liquid crystal modulation elements. Therefore, it is possible to prevent dust from adhering to the light outgoing surfaces of the liquid crystal modulation elements. Furthermore, it is possible to prevent light reflection at the interface surface between the light outgoing surfaces and air because of the difference in refractive index therebetween. This permits the projection of a high-quality image without deteriorating the switching characteristic of the liquid crystal modulation elements while preventing dust from adhering to the light outgoing surfaces of the liquid crystal modulation elements.--

IN THE SPECIFICATION:

Page 1, line 1, delete "DESCRIPTION";

line 4, change "Technical Field" to --BACKGROUND OF THE

INVENTION--;

between lines 4 and 5, insert --1. Field of the Invention--;

line 11, change "Background Art" to --2. Description of Related

Art--; and

line 20, change "Fig. 11 schematically shows" to --Figs. 11(A)-(C)

schematically show--.

Page 4, between lines 22 and 23, insert --SUMMARY OF THE

INVENTION--.

Page 5, line 6, delete "Disclosure of Invention".

Page 12, line 21, change "Brief Description of the Drawings" to --BRIEF

DESCRIPTION OF THE DRAWINGS--.

Page 13, line 9, change "Fig. 6 is an enlarged view" to --Figs. 6(A)-(B) are

enlarged views--;

line 13, change "Fig. 8 is an enlarged view" to --Figs. 8(A)-(B) are

enlarged views--; and

line 25, change "Fig. 11 is a schematic structural view" to

--Figs. 11(A)-(C) are schematic structural views--.

Page 14 line 4, change "Best Mode for Carrying Out the Invention" to

--DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS--.

Page 16, line 1, change "17" to --30--.

Page 18, lines 6-7, change "uniform illumination optical system 923" to --light

source lamp unit--.

Page 19, line 12, change "optical element" to --optical system--; and  
line 25, change "light valve" to --liquid crystal modulation devices--.

Page 20, line 9, change "modulation elements" to --liquid crystal modulation  
devices--; and

line 21, change "805" to --80--.

Page 25, line 1, change "75b" to --75d--; and  
lines 19-20, delete "as shown in FIG. 5".

Page 26, line 11, change "modulation element unit" to --modulation device  
mounting member--.

Page 27, line 4, change "liquid crystal panel 40R" to --liquid crystal modulation  
device 925R--; and

line 19, change "70" to --70R--.

Page 28, line 23, change "72a" to --72b--.

Page 33, line 8, change "transmissive" to --absorptive--.

Page 34, line 9, change "FIGS. 12(A) and 12(B)" to --FIGS. 8(A) and 8(B)--.

Page 41, line 12, change "transmissive" to --absorptive--; and  
line 19, change "third" to --second--.

Page 43, line 8, change "2941" to --2943--; and  
line 13, change "2901B" to --2901R--.

Page 45, line 6, delete "10".

Page 46, line 24, change "second" to --third--.

IN THE DRAWINGS:

Please amend Figs. 5 and 7 as set forth in the Request for Approval of Drawing  
Corrections.

IN THE CLAIMS:

Please amend claims 1-17 as follows:

1. (Amended) An optical modulation [element for modulating] device that modulates a light flux emitted from a light source according to image information, the optical modulation device comprising:

an optical modulation element; and

[wherein] a transparent plate [is] formed on at least one surface [thereof] of the optical modulation element.

2. (Amended) The optical modulation [element] device according to claim 1, further comprising:

[wherein] a polarizer [is] bonded to said transparent plate.

3. (Amended) The optical modulation [element] device according to [Claim 1 or 2] Claim 1,

[wherein] said transparent plate having a surface and the surface of said transparent plate [is] being coated with a surface active agent, or treated for electrostatic protection.

4. (Amended) A projection display device [having] comprising:

a light source;

an optical modulation element [for modulating] that modulates a light flux emitted from [a] the light source according to image information;[, and]

a projection [means for magnifying] unit that magnifies and [projecting] projects the light flux modulated by said optical modulation element [onto a projection plane,]; and

[wherein] a transparent plate [is] formed on [the] a light [emergent] emitting surface of said optical modulation element.

5. (Amended) The projection display device according to Claim 4, further comprising:

[wherein] an antireflection film [is] formed on at least one surface of said transparent plate.

6. (Amended) The projection display device according to Claim 4 [or 5],

[wherein] said transparent plate having a thickness and said projection unit having a focal depth, and the thickness of said transparent plate [is] being set larger than the focal depth of said projection [means] unit.

7. (Amended) The projection display device according to Claim 4 [or 5], further comprising:

[wherein] a polarizer [is] having an optical axis interposed between said transparent plate and said projection [means] unit, said transparent plate [is] being made of a drawing resin and having an optical axis, and the optical axis of said transparent plate almost aligns with the optical axis of said polarizer.

8. (Amended) The projection display device according to Claim 7, [wherein] said polarizer [is composed of] comprising a polarizing layer and a pair of substrates [for sandwiching] that sandwich said polarizing layer and are made of a substrate material, and said transparent plate [is] being made of the substrate [same] material [as that of] used in making said substrates.

9. (Amended) The projection display device according to Claim 7 [or 8],

[wherein] said polarizer [is] being bonded to said transparent plate.

10. (Amended) The projection display device according to [any of Claims 4 to 8] Claim 4,

[wherein] said transparent plate having a surface and the surface of said transparent plate [is] being coated with a surface active agent, or treated for electrostatic protection.

11. (Amended) The projection display device according to [any of Claims 4 to 10] Claim 4, further comprising a mounting member and a color synthesizing

prism, [wherein] said optical modulation element [is] being mounted via [a] the mounting member on [a] the color synthesizing prism [for forming said projection means], said mounting member [includes] comprising:

a mounting frame plate composed of a first frame member and a second frame [members for sandwiching] member that sandwich said optical modulation element[.]

a fixed frame plate [to be] in a fixed contact with [the] a light incident surface of said color synthesizing prism<sub>1</sub>[.], and

an intermediate frame plate [to be] sandwiched between said mounting frame plate and said fixed frame plate.

12. (Amended) The projection display device according to Claim 11, [wherein] said mounting frame plate [is] being made of a resin containing glass fiber.

13. (Amended) The projection display device according to Claim 11, [wherein] said mounting frame plate [is] being made of metal.

14. (Amended) A projection display device [having] comprising:  
a light source;

an optical modulation element [for modulating] that modulates a light flux emitted from [a] the light source according to image information<sub>1</sub> [, and]

a projection [means for magnifying] unit that magnifies and [projecting] projects the light flux modulated by said optical modulation element [onto a projection plane said projection display device comprising:] ; and

a partition [for surrounding] that surrounds said optical modulation element via an air layer and thereby [separating] separates said optical modulation element from said light source and said projection [means] unit,

said partition having a transparent plate fitted in a light incident window corresponding to [the] a light incident surface of said optical modulation element, and a light



outgoing window [for emitting] that emits the light flux modulated by said optical modulation element therefrom.

15. (Amended) The projection display device according to Claim 14, further comprising:

[wherein] a fan [for circulating] that circulates air [is] located inside said partition.

16. (Amended) The projection display device according to Claim 14 [or 15], further comprising:

[wherein said] a polarizer [is] bonded to said transparent plate.

17. (Amended) The projection display device according to Claim 14 [or 15],  
[wherein] said transparent plate having a surface and the surface of said transparent plate [is] being coated with a surface active agent, or treated for electrostatic protection.


#### REMARKS

Claims 1-17 are pending. By this Amendment, the specification and claims are amended. The specification and claims 1-17 are amended for further clarity. No new matter is added.

The above amendments place the application in even better condition for initial examination. Prompt consideration and allowance in due courses are earnestly solicited.

Should the Examiner believe that anything further is desirable in order to place this application in even better condition for allowance, the Examiner is requested to contact the Applicant's undersigned representative at the telephone number listed below.

Respectfully submitted,

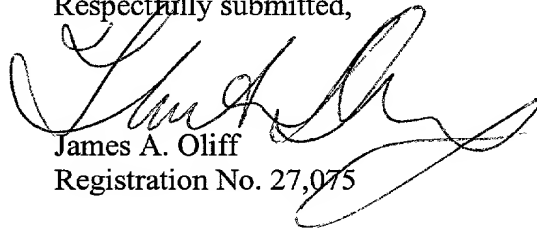

James A. Oliff  
Registration No. 27,075

Thu Anh Dang  
Registration No. 41,544

JAO:TAD/vjb

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320  
Telephone: (703) 836-6400

**PATENT APPLICATION**

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Toshiaki HASHIZUME and Shinji HABA

Application No.: U.S. National Stage of PCT/JP98/02200

Filed: January 7, 1999

Docket No.: 101850

For: OPTICAL MODULATION ELEMENT AND PROJECTION DISPLAY DEVICE

**REQUEST FOR APPROVAL OF DRAWING CORRECTION(S)**


Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The Examiner is requested to review and approve the proposed corrections to Figures 5 and 7 marked in red on the attached copy of such drawing figures.

Upon approval by the Examiner, and upon allowance of this application, the formal drawings will be corrected.

Respectfully submitted,

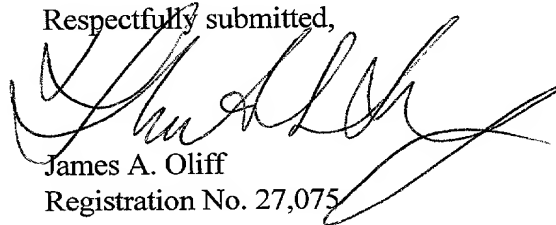

James A. Oliff  
Registration No. 27,075

Thu Anh Dang  
Registration No. 41,544

JAO:TAD/cct

**OLIFF & BERRIDGE, PLC**  
**P.O. Box 19928**  
**Alexandria, Virginia 22320**  
**Telephone: (703) 836-6400**





- 1 -

## DESCRIPTION

## OPTICAL MODULATION ELEMENT AND PROJECTION DISPLAY DEVICE

## Technical Field

5 The present invention relates to an optical modulation element and a projection display device, and more particularly, to a layout structure of optical elements on the periphery of an optical modulation element that modulates a light flux according to image information.

## Background Art

10 A projection display device basically includes a light source lamp unit, an optical unit for optically processing a light flux emitted from the light source lamp unit so as to synthesize a color image according to image information, a projection lens unit for magnifying and projecting the synthesized light flux onto a screen, a power supply unit, and a circuit substrate on which a control circuit and the like are mounted.

20 FIG. 11 schematically shows the construction of the optical unit and the projection lens unit of the above-mentioned components. As shown in this figure, an optical system of an optical unit 9a includes a lamp body 81 serving as a light source, a color separation optical system 924 for separating a light flux W emitted from the lamp body 81 into

25

color light fluxes R, G, and B of the primary colors, red (R), green (G), and blue (B), three liquid crystal modulation elements (optical modulation elements) 925R, 925G, and 925B for modulating each of the separated color light fluxes according to image information, and a color synthesizing prism 910 in the shape of a prism with a square cross section to synthesize the modulated color light fluxes. The light flux W emitted from the lamp body 81 is separated into each of color light fluxes R, G, and B by the color separation optical system 924 having various types of dichroic mirrors. The red and green light fluxes R and G of each of the color light fluxes are emitted from outgoing sections formed in the color separation optical system 924 toward the corresponding liquid crystal modulation elements 925R and 925G. The blue light flux B is guided to the corresponding liquid crystal modulation element 925B via a light guide system 927. The blue light flux B is emitted from an outgoing section formed in the light guide system 927 toward the corresponding liquid crystal modulation element 925B.

As shown in FIGS. 11(B) and 11(C) as enlarged views, in the optical unit 9a, polarizers 960R, 960G, and 960B are respectively placed on the incident sides of the liquid crystal modulation elements 925R, 925G, and 925B so that they unify the planes of polarization of the respective

color light fluxes to be incident on the liquid crystal modulation elements 925R, 925G, and 925B. Moreover, polarizers 961R, 961G, and 961B are respectively placed on the outgoing sides of the liquid crystal modulation elements 925R, 925G, and 925B so that they unify the planes of polarization of the respective modulated color light fluxes to be incident on the color synthesizing prism 910. The actions of these polarizers permit the projection of a high-contrast magnified image onto a screen 10. The outgoing-side polarizers 961R, 961G, and 961B of the two types of polarizers that sandwich the liquid crystal modulation elements 925R, 925G, and 925B, respectively, are bonded to the light outgoing surfaces of the liquid crystal modulation elements 925R, 925G, and 925B.

As the liquid crystal modulation elements 925R, 925G, and 925B, an active-matrix liquid crystal device is generally used, in which pixels arranged in a matrix are controlled by a switching element.

In order to enhance the contrast of an image to be magnified and projected onto the screen 10, it is effective to bond a polarizer, which has a high wavelength selectivity with respect to polarized light, to the light outgoing surfaces of each of the liquid crystal modulation elements 925R, 925G, and 925B. However, such a polarizer having a high wavelength selectivity absorbs much light, and



therefore, generates much heat. Inside the projection display device mentioned above, air flow is formed as shown in FIG. 11(C) and cools the polarizer. Since the polarizer is directly attached to the light outgoing surfaces of the liquid crystal modulation element, however, heat is apt to be transmitted to the liquid crystal modulation element, and to thereby increase the temperature of the liquid crystal modulation element. This increase in temperature deteriorates the optical properties of a liquid crystal panel and the image contrast.

Accordingly, it may be possible to place the polarizer apart from the light outgoing surfaces of the liquid crystal modulation element. However, if the polarizer is simply placed apart from the light outgoing surfaces, there is a fear that the switching element in the liquid crystal modulation element may malfunction due to a light flux reflected by the light outgoing surfaces of the liquid crystal modulation element. Moreover, there is a fear that dust or the like may be caused by an air flow formed inside the projection display device to adhere to the light outgoing surfaces of the liquid crystal modulation element, and it may make high-quality image projection impossible.

In view of the above-mentioned problems, an object of the present invention is to provide an optical modulation element and a projection display device that achieve high-

quality image projection by preventing dust from adhering to the light outgoing surfaces of the optical modulation element without deteriorating the switching characteristic of the optical modulation element.

5

#### Disclosure of Invention

In order to achieve the above object, an optical modulation element of the present invention has a transparent plate on at least one surface thereof.

10

In such an optical modulation element, heat generated by a polarizer can be prevented from being directly transmitted thereto, and the increase in temperature thereof can be controlled. This makes it possible to prevent the optical properties of the optical modulation element from deteriorating due to the heat generation of the polarizer.

15

Furthermore, the transparent plate can prevent light reflection at the interface surface between the optical modulation element and air because of the difference in refractive index therebetween. This makes it possible to prevent the optical properties of the optical modulation element from deteriorating due to surface reflection.

20

Still furthermore, even if dust or the like is diffused by the air flow formed inside a projection display device, since the surface of the optical modulation element is protected by the transparent plate, direct adhesion of dust

25

thereto can be prevented.

Preferably, a polarizer is bonded to the transparent plate of the optical modulation element. Since this can prevent the entry of dust between the optical modulation element and the polarizer, the polarization condition of light is not disturbed by dust. When a black image is displayed, a spot on the black image corresponding to a portion where dust adheres can be prevented from being displayed as a white blank, which improves the display quality.

The surface of the transparent plate of the optical modulation element may be coated with a surface active agent or treated for electrostatic protection. In this case, since it is difficult for dust to adhere to the surface of the transparent plate, the adhesion of dust can be avoided more effectively.

A projection display device of the present invention includes an optical modulation element for modulating a light flux emitted from a light source according to image information, and projection means for magnifying and projecting the light flux modulated by the optical modulation element onto a projection plane, wherein a light outgoing surfaces of the optical modulation element is provided with a transparent plate.

In the projection display device of the present

invention, a polarizer is not directly attached to the light outgoing surfaces of the optical modulation element, and a transparent plate is formed thereon. Therefore, it is possible to prevent heat generated by the polarizer from being directly transmitted to the optical modulation element, and to control the increase in temperature of the optical modulation element. This can avoid the deterioration of the optical properties of a liquid crystal panel resulting from the heat generation of the polarizer.

Furthermore, the transparent plate formed on the light outgoing surfaces of the optical modulation element can prevent light reflection at the interface surface between the light outgoing surfaces of the optical modulation element and air because of the difference in refractive index therebetween. This prevents the deterioration of the switching characteristic of the optical modulation element resulting from the reflection at the light outgoing surfaces of the optical modulation element.

Still furthermore, even if dust or the like is diffused by the air flow formed in the device, since the light outgoing surfaces of the optical modulation element is protected by the transparent plate, it is possible to prevent dust from directly adhering to the light outgoing surfaces. Consequently, according to the projection display device of the present invention, a high-quality image can be

projected onto a projection plane by preventing dust from adhering to the light outgoing surfaces of the optical modulation element without deteriorating the switching characteristic of the optical modulation element.

5        Preferably, at least one surface of the transparent plate is coated with an antireflection film. The use of such a transparent plate makes it possible to eliminate the light reflected by the transparent plate and returned to the optical modulation element, and to prevent the deterioration .  
10 of the switching characteristic of the optical modulation element due to the return light from the transparent plate.

       Preferably, the thickness of the transparent plate is set larger than the focal depth of the projection means. When the thickness is set thus, even if dust or the like  
15 adheres to the surface of the transparent plate, it is blurred and made inconspicuous on the projection plane.

       When a polarizer is interposed between the transparent plate and the projection means, preferably the transparent plate is made of a drawing resin and the optical axes of the  
20 transparent plate and the polarizer are aligned with each other. This makes it possible to prevent image degradation resulting from the anisotropy of the liquid crystal modulation element.

       The transparent plate may be made of the same material  
25 as that of a pair of substrates which sandwich a polarizing

layer, of the constituents of the polarizer. By thus making the transparent plate of the same material as that of the substrates for sandwiching the polarizing layer, the number of types of components can be reduced. Furthermore, since  
5 the substrates for sandwiching the polarizing layer are considerably faultless substrates to be bonded to the optical modulation element, when the transparent plate is made of the same material as that of the substrates, image degradation resulting from a defect in the transparent plate  
10 can be naturally avoided.

When the polarizer is bonded to the transparent plate, since it is possible to prevent dust from entering between the optical modulation element and the polarizer, the polarization condition of light is not disturbed by dust.  
15 Moreover, when a black image is displayed, a spot on the black image corresponding to a portion where dust adheres can be prevented from being displayed as a white blank, which improves the display quality.

The surface of the transparent plate may be coated with  
20 a surface active agent or treated for electrostatic protection. In this case, since it is difficult for dust to adhere to the surface of the transparent plate, the adhesion of dust can be avoided more effectively.

The optical modulation element may be attached via a  
25 mounting member to a color synthesizing prism for forming

the projection means. The mounting member includes a mounting frame plate composed of first and second frame members for sandwiching the optical modulation element, a fixed frame plate to be in fixed contact with the light  
5 incident surface of the color synthesizing prism, and an intermediate frame plate to be sandwiched between the mounting frame plate and the fixed frame plate.

Then, the mounting member with the optical modulation element mounted thereon is attached by making the fixed  
10 frame plate abut on the color synthesizing prism. Therefore, the optical modulation element can be held by the mounting member, and the mounting is facilitated.

When the mounting frame plate is made of a resin containing glass fiber, it is possible to restrict linear  
15 expansion, to prevent shifting of the liquid crystal modulation element, and to maintain a constant temperature and a uniform in-plane temperature distribution of the liquid crystal modulation element.

On the other hand, when the mounting frame plate is  
20 made of metal, it is possible to improve the heat radiation effect. In particular, when a polarizer is bonded to the transparent plate, it is preferable that the mounting frame plate be made of metal because heat arises with the absorption of light by the polarizer.

25 A projection display device of the present invention

includes an optical modulation element for modulating a light flux emitted from a light source according to image information, and projection means for magnifying and projecting the light flux modulated by the optical modulation element onto a projection plane, the projection display device further including a partition for surrounding the optical modulation element via air and separating the optical modulation element from the light source and the projection means, the partition having a transparent plate fitted in a light incident window corresponding to a light incident surface of the optical modulation element, and a light outgoing window for emitting the light flux modulated by the optical modulation element therefrom.

In the projection display device having this construction, by placing a polarizer on the outer wall of the partition or apart from the partition, most of the heat generated by the polarizer can be removed outside the partition. Moreover, since the optical modulation element is surrounded by the partition, it is possible to prevent dust from entering from outside and adhering to the light incident and outgoing surfaces of the optical modulation element, and to thereby continuously project a high-quality image onto the projection plane.

In the projection display device having this construction, the dissipation of heat from the optical



modulation element itself can be promoted by placing a fan for circulating air inside the partition, which can avoid the deterioration of the optical properties resulting from the heat generation by the optical modulation element.

5 In such a projection display device, when a polarizer is bonded to the transparent plate, since it is possible to prevent dust from entering between the optical modulation element and the polarizer, the polarization condition of light is not disturbed by dust. Moreover, when a black  
10 image is displayed, a spot on the black image corresponding to a portion where dust adheres can be prevented from being displayed as a white blank, and display quality can be improved.

15 In such a projection display device, the surface of the transparent plate may be coated with a surface active agent or treated for electrostatic protection. In this case, since it is difficult for dust to adhere to the surface of the transparent plate, the adhesion of dust can be avoided more effectively.

#### 20 Brief Description of the Drawings

FIG. 1 is a perspective view showing the external appearance of a projection display device to which the present invention is applied.

25 FIG. 2 is a schematic plan structural view showing the

internal structure of the projection display device shown in FIG. 1.

FIG. 3 is a schematic sectional structural view taken along line A-A in FIG. 2.

5        FIG. 4 is a schematic plan structural view showing only an optical unit and a projection lens unit.

FIG. 5 is a schematic structural view of an optical system incorporated in the optical unit.

10       FIG. 6 is an enlarged view showing the surroundings of a liquid crystal modulation element.

FIG. 7 is an exploded perspective view showing the structure of a liquid crystal modulation element unit.

15       FIG. 8 is an enlarged view showing the surroundings of a liquid crystal modulation element in a projection display device according to a second embodiment of the present invention.

20       FIG. 9 is an enlarged view showing the surroundings of a liquid crystal modulation element in a projection display device according to a third embodiment of the present invention.

FIG. 10 is an enlarged view showing the surroundings of a liquid crystal modulation element in a projection display device according to a fourth embodiment of the present invention.

25       FIG. 11 is a schematic structural view of an optical

system incorporated in an optical unit of a conventional projection display device.

#### Best Mode for Carrying Out the Invention

##### 5 <First Embodiment>

10 An embodiment of a projection display device, to which the present invention is applied, will be described below with reference to the drawings. The projection display device of this embodiment separates a light flux emitted from a light source lamp unit into light fluxes of the primary colors, red (R), blue (B), and green (B), modulates these color light fluxes according to image information through liquid crystal modulation elements serving as optical modulation elements, synthesizes the modulated color light fluxes, and 15 magnifies and displays the synthesized flux onto a screen via a projection lens unit.

FIG. 1 shows the external appearance of the projection display device of this embodiment. As shown in this figure, a projection display device 1 of this embodiment has an 20 outer casing 2 in the shape of a rectangular parallelepiped. The outer casing 2 basically consists of an upper casing 3, a lower casing 4, and a front casing 5 for defining the front of the device. The leading end of a projection lens unit 6 protrudes from the center of the front casing 5.

25 FIG. 2 shows the layout of components inside the outer

casing 2 of the projection display device 1, and FIG. 3 is a cross-sectional view taken along line A-A in FIG. 2. As shown in these figures, a power supply unit 7 is located on the rear end of the inside of the outer casing 2. A light source lamp unit 8 is placed at a position next to and offset from the power supply unit 7 toward the front side of the device. An optical unit 9 is placed in front of the light source lamp unit 8. Positioned at the front center of the optical unit 9 is the base end of the projection lens unit 6.

On the other hand, an interface substrate 11 with an input-output interface circuit mounted thereon is located on a side of the optical unit 9 so that it extends toward the front and rear of the device, and a video substrate 12 with a video signal processing circuit mounted thereon is located in parallel therewith. Moreover, a control substrate 13 for controlling the drive of the device is placed above the light source lamp unit 8 and the optical unit 9. Speakers 14R and 14L are placed at the right and left front corners of the device, respectively. A suction fan 15A for cooling is placed on the center upper side of the optical unit 9, and a circulating fan 15B for forming a circulating stream for cooling is placed on the center bottom side of the optical unit 9. Furthermore, an exhaust fan 16 is placed on a side of the device, that is, at the rear of the light

source lamp unit 8. Moreover, an auxiliary cooling fan 17 for sucking the cooling air stream from the suction fan 15A into the power supply unit 7 is placed at a position in the power supply unit 7 opposed to the ends of the substrates 11 and 12.

A floppy-disk drive unit 18 is placed directly above the power supply unit 7 on the left side of the device.

The light source lamp unit 8 includes a light source lamp 80, and a lamp housing 83 having the light source lamp 80 built therein. The light source lamp 80 includes a lamp body 81, such as a halogen lamp, a xenon lamp, or a metal halide lamp, and a reflector 82 provided with a reflecting surface that is parabolic in cross section, and it can reflect light emitted from the lamp body 81 so that the light emerges toward the optical unit 9 almost along the optical axis.

FIG. 4 shows only the optical unit 9 and the projection lens unit 6. In the optical unit 9, as shown in this figure, optical elements other than a color synthesizing prism 910 are vertically sandwiched and held between upper and lower light guides 901 and 902.

These upper and lower light guides 901 and 902 are fixed by fixing screws on the sides of the upper casing 3 and the lower casing 4, respectively. Moreover, the upper and lower light guides 901 and 902 are similarly fixed on

the sides of a color synthesizing prism 910 by fixing screws. The color synthesizing prism 910 is fixed by fixing screws on the rear of a thick head plate 903 formed of a die-cast plate. The base end side of the projection lens unit 6 is similarly fixed on the front of the head plate 903 by fixing screws.

FIG. 5 schematically shows the configuration of an optical system incorporated in the projection display device 1 of this embodiment. The optical system in the projection display device 1 of this embodiment adopts the light source lamp 80 serving as a component of the aforesaid light source lamp unit 8, and a uniform illumination optical system 923 composed of integrator lenses 921 and 922 serving as uniform illumination optical elements.

The projection display device 1 includes a color separation optical system 924 for separating a light flux W emitted from the uniform illumination optical system 923 into red (R), green (G), and blue (B) fluxes, three liquid crystal modulation elements 925R, 925G, and 925B for modulating the respective color light fluxes R, G, and B, the color synthesizing prism 910 serving as a color synthesizing optical system for synthesizing the modulated color light fluxes, and a light guide system 927 for guiding the synthesized color light fluxes to the liquid crystal modulation element 925B corresponding to the blue light flux

B in the projection lens unit 6 that magnifies and projects the synthesized color light fluxes onto the surface of a screen 10.

The uniform illumination optical system 923 includes a reflecting mirror 931 so as to bend an optical axis 1a of light emerging from the uniform illumination optical system 923 into a right angle toward the front of the device. The integrator lenses 921 and 922 intersect at right angles so that the reflecting mirror 931 is located therebetween.

Light emitted from the light source lamp 80 is projected as a secondary light source image via the integrator lens 921 onto the incident surface of each of the lenses that constitute the integrator lens 922. An object to be illuminated is irradiated with the outgoing light from the integrator lens 922.

The color separation optical system 924 includes a blue-green reflecting dichroic mirror 941, a green reflecting dichroic mirror 942, and a reflecting mirror 943. First, the blue light flux B and the green light flux G contained in the light flux W are reflected at right angles by the blue-green reflecting dichroic mirror 941, and directed toward the green reflecting dichroic mirror 942.

The red light flux R passes through the blue-green reflecting mirror 941, is reflected at right angles by the reflecting mirror 943 located behind, and emerges from an

outgoing section 944 for the red light flux R toward the prism unit 910. Next, only the green light flux G of the blue and green light fluxes B and G reflected by the blue-green reflecting mirror 941 is reflected at right angles by the green reflecting dichroic mirror 942, and emerges from an outgoing section 945 for the green light flux G toward the color synthesizing optical system. The blue light flux B having passed through the mirror 942 emerges from an outgoing section 946 for the blue light flux B toward the light guide system 927. In this embodiment, all of the distances between the outgoing section for the light flux W of the uniform illumination optical element and the outgoing sections 944, 945, and 946 for the color light fluxes of the color separation optical system 924 are equally set.

Condenser lenses 951 and 952 are placed on the outgoing sides of the outgoing sections 944 and 945 for the red and green light fluxes R and G in the color separation optical system 942, respectively. Therefore, the red and green light fluxes R and G emerging from the outgoing sections respectively enter the condenser lenses 951 and 952, where they are collimated.

The red and green light fluxes R and G thus collimated enter the liquid crystal modulation elements 925R and 925G, are modulated, and given image information corresponding thereto. That is, these light valves 925R and 925G are



subjected to switching control according to image  
information by a driving means that is not shown, whereby  
the color light fluxes having passed therethrough are  
modulated. As such a driving means, well-known means may be  
5 used unchanged.

On the other hand, the blue light flux B is guided to  
the corresponding liquid crystal modulation element 925B via  
the light guide system 927, where it is similarly modulated  
according to image information. In the modulation elements  
10 of this embodiment, for example, a polysilicon TFT may be  
used as a switching element.

The light guide system 927 includes a condenser lens  
954 placed on the outgoing side of the outgoing section 946  
for the blue light flux B, an incident-side reflecting  
15 mirror 971, an outgoing-side reflecting mirror 972, an  
intermediate lens 973 interposed between these reflecting  
mirrors, and a condenser lens 953 placed upstream of the  
liquid crystal modulation element 925B. The blue light flux  
B of the color light fluxes has the longest optical path  
20 length, that is, the distance between a light source lamp  
805 and the respective liquid crystal panel for the blue  
light flux B is the longest, and therefore, the amount of  
light of the blue light flux B to be lost is the largest.  
The light loss can, however, be restricted by interposing  
25 the light guide system 927 therebetween.

The color light fluxes R, G, and B modulated through the respective liquid crystal modulation elements 925R, 925G, and 925B enter the color synthesizing prism 910, where they are synthesized. A color image synthesized by the color synthesizing prism 910 is magnified and projected via the projection lens unit 6 onto the screen 10 located at a predetermined position.

FIG. 6 is an enlarged view showing the surroundings of the liquid crystal modulation elements (optical modulation elements) 925R, 925G, and 925B. As shown in this figure, the color synthesizing prism 910 of this embodiment is in the shape of a quadrangular prism having an almost square cross section by bonding four triangular prisms together. The color synthesizing prism 910 is provided with dielectric multilayer films on the bonded surfaces thereof having the form of an X, and given desired optical properties. The flat liquid crystal modulation elements 925R, 925G, and 925B face three sides (light incident surfaces) 911R, 911G, and 911B of the color synthesizing prism 910 except the side facing the projection lens unit 6 at a predetermined distance. Incident-side polarizers 960R, 960G, and 960B serving as polarizing elements are placed at a predetermined distance from light incident surfaces 9251R, 9251G, and 9251B of the liquid crystal modulation elements 925R, 925G, and 925B, respectively.

On the sides of the liquid crystal modulation elements 925R, 925G, and 925B where light outgoing surfaces 9252R, 9252G, and 9252B are provided, outgoing-side polarizers 961R, 961G, and 961B are bonded to light incident surfaces 911R, 911G, and 911B of the color synthesizing prism 910, respectively. In this embodiment, the outgoing-side polarizers 961R, 961G, and 961B are apart from the light outgoing surfaces 9252R, 9252G, and 9252B of the liquid crystal modulation elements 925R, 925G, and 925B.

Bonded to the light outgoing surfaces 9252R, 9252G, and 9252B of the liquid crystal modulation elements 925R, 925G, and 925B are transparent plates 970R, 970G, and 970B that are made of the same material as that of the substrates (not shown) for sandwiching a polarizing layer of the members constituting the outgoing-side polarizers 961R, 961G, and 961B, such as for example, triacetate cellulose.

The optical axes of the transparent plates 970R, 970G, and 970B almost align with the optical axes of the outgoing-side polarizers 961R, 961G, and 961B. Moreover, antireflection thin films are formed on the outgoing-side surfaces of the transparent plates 970R, 970G, and 970B by evaporation. The antireflection films prevent light reflection at the interface surfaces between the liquid crystal modulation elements 925R, 925G, and 925B and air because of the difference in refractive index therebetween,

thereby eliminating return light to the liquid crystal modulation elements 925R, 925G, and 925B, and preventing the malfunction of the liquid crystal modulation elements 925R, 925G, and 925B.

5        FIG. 7 shows a structure in which such liquid crystal modulation elements 925R, 925G, and 925B are attached to the light incident surfaces of the color synthesizing prism 910.

         In FIG. 7, a mounting member 70R is shown in a disassembled state.

10        The mounting member 70R includes a mounting frame plate 71 for holding the liquid crystal modulation element 925R and the transparent plate 970R. The mounting frame plate 71 includes first and second frame plates 72 and 73 between which the liquid crystal modulation element 925R and the  
15        transparent plate 970R are sandwiched and held. FIG. 7 shows only the first frame plate 72, and the second frame plate 73, the liquid crystal modulation element 925R, and the transparent plate 970R having already been fixed to the first frame plate 72. The mounting member 70R also includes  
20        a fixed frame plate 74 to be fixedly bonded to the light incident surface 911R of the color synthesizing prism 910. The mounting frame plate 71 is detachably fixed to the fixed frame plate 74 via an intermediate frame plate 75.

         The first frame plate 72 of the mounting frame plate 71  
25        has a rectangular opening 72a for light transmission, and a

peripheral wall 72b having a uniform thickness on the periphery thereof. The second frame plate 73 also has a rectangular opening (not shown) for light transmission. The size of the second frame plate 73 is such that it just fits in the inside of the peripheral wall 72b of the first frame plate 72.

Therefore, by fitting the second frame plate 73 in the first frame plate 72 while the liquid crystal modulation element 925R and the transparent plate 970R are sandwiched therebetween, the mounting frame plate 71 is formed, in which the liquid crystal modulation element 925R and the transparent plate 970R are held between these frame plates 72 and 73.

The intermediate frame plate 75 is a rectangular frame that has almost the same size as that of the first frame plate 72 of the mounting frame plate 71, and is provided with a rectangular opening 75a for light transmission. The intermediate frame plate 75 has engaging projections 75d that extend perpendicularly from the surface of the frame plate at the four corners of the rectangular opening 75a. The first frame plate 72 of the mounting frame plate 71 has engaging holes 72d formed at positions corresponding to the respective engaging projections 75d, into which the engaging projections 75d can be inserted. Therefore, when the respective engaging holes 72d of the mounting frame plate 71

and the engaging projections 75b of the intermediate frame plate 75 are aligned and overlaid one on another , the respective engaging projections 75d are inserted in the respective engaging holes 72d, whereby a temporarily  
5 attached state is obtained.

On the other hand, the fixed frame plate 74 is also a rectangular frame plate having a rectangular opening 74a for light transmission. The rear of the fixed frame plate 74 is fixed on the light incident surface 911R of the color  
10 synthesizing prism 910 with an adhesive. The fixed frame plate 74 has screw holes 74c at both ends of its upper frame section and at the widthwise center of its lower frame section. The intermediate frame plate 75 also has screw holes 75c corresponding to the three screw holes 74c, and is  
15 fixed to the fixed frame plate 74 by inserting flat-head screws 76 for fastening into the corresponding screw holes 74c and 75c. While the intermediate frame plate 75 is fixed to the fixed frame plate 74 by the three screws 76 in this embodiment, the number of screws may be four as shown in  
20 FIG. 5, or more. In general, as the number of screws decreases, the number of steps of fastening the screws decreases.

The fixed frame plate 74 also has engaging projections 74b at the right and left corners of its lower frame  
25 section. Corresponding to the two engaging projections 74b,

the intermediate frame plate 75 has engaging holes 75b at the right and left corners of its lower frame section. Therefore, when being fixed with the screws 76, the intermediate frame plate 75 can be temporarily fixed to the fixed frame plate 74 by pushing the intermediate frame plate 75 toward the fixed frame plate 74 while aligning the engaging holes 75b of the intermediate frame plate 75 with the engaging projections 74b of the fixed frame plate 74. This makes it possible to further improve the positioning accuracy of both the frame plates.

Such a liquid crystal modulation element unit 70R includes positioning means for positioning the mounting frame plate 71 with respect to the intermediate frame plate 75 that is fixed to the fixed frame plate 74. The positioning means includes two wedges 77. Wedge guide surfaces 72e to 72g, against which inclined surfaces 77a of the wedges 77 abut, are formed on the vertical centers of the right and left sides of the peripheral wall 72a of the first frame plate 72 in the mounting frame plate 71. When the mounting frame plate 71 is temporarily attached to the intermediate frame plate 75, wedge insertion grooves are formed between the wedge guide surfaces 72e of the first frame plate 72 and the frame sections of the intermediate frame plate 75 facing the wedge guide surfaces 72e.

Therefore, after the mounting frame plate 71 is

temporarily attached to the intermediate frame plate 75, the two wedges 77 are driven in the right and left sides of the first frame plate 72, and the amount of the wedges 77 to be driven in is adjusted, whereby the liquid crystal panel 40R can be positioned.

In this embodiment, the fixed frame plate 74 and the intermediate frame plate 75 are flat. As mentioned with reference to FIG. 3, the circulating fan 15B is placed below the color synthesizing prism 910, and cooling air flows from bottom to top. In order to prevent this flow from being disturbed, it is preferable to place straightening vanes above the circulating fan 15B. Since the fixed frame plate 74 and the intermediate frame plate 75 are flat, the straightening vanes can be mounted at a position directly below the mounting member 70R. Consequently, cooling air can flow effectively from bottom to top. Furthermore, since these frame plates have a simple shape, parts can be easily utilized, and the accuracy of the parts is thereby improved.

Furthermore, in the mounting member 70, the two wedges 77 are used for positioning, and they are fixedly bonded to the vertical centers of the right and left sides of the first frame plate 72 and the intermediate frame plate 75. If the wedges 77 are fixedly bonded at inadequate positions, there is a fear that heat deformation of the first frame plate 72, the intermediate frame plate 75, or the wedges 77



will cause excessive stress concentration in the respective members. Moreover, this may cause the wedges 77 to separate from the first frame plate 72 or the intermediate frame plate 75.

5 As mentioned above, however, since the wedges 77 are fixedly bonded to the centers of the right and left sides, the first frame plate 72 and the intermediate frame plate 75 are free to thermally deform in the vertical direction centered on the wedges 77. Therefore, the degree to which  
10 the heat deformation of these frame plates is restrained is low, and it is possible to avoid negative effects, such as undesired stress concentration and separation of the wedges.

Furthermore, each of the wedges 77 of this embodiment each has two blind holes 77c on its rear side 77b, as shown  
15 in FIG. 7. In chucking the wedges 77 with a jig, these blind holes 77c function as engaging portions for chucking. Such blind holes 77c permit easy chucking and easy handling.

While the blind holes 77c for engagement in chucking are formed on the rear side of the wedges 77 in this  
20 embodiment, such engaging portions for chucking may be formed in other members. For example, engaging portions for chucking, such as blind holes, may be formed on the outer surface of the peripheral wall 72a of the panel frame plate 71.

25 In this case, when the mounting frame plate 71 is made

of a resin containing glass fiber, such as FRP, it is possible to restrict linear expansion, to prevent the shift of the liquid crystal modulation elements 925R, 925G, and 925B, and to maintain a constant temperature and a uniform in-plane temperature distribution of the liquid crystal modulation elements 925R, 925G, and 925B.

Furthermore, when the mounting frame plate 71 is made of metal, it is possible to improve the heat radiation effect. This is effective, in particular, when a polarizer is bonded to the transparent plate because the heat caused by light being absorbed by the polarizer can be efficiently radiated.

In the projection display device 1 of this embodiment that has such a construction, since the outgoing-side polarizers 961R, 961G, and 961B are apart from the light outgoing surfaces 9252R, 9252G, and 9252B of the liquid crystal modulation elements 925R, 925G, and 925B, the heat generated by the outgoing-side polarizers 961R, 961G, and 961B can be prevented from being transmitted to the liquid crystal modulation elements 925R, 925G, and 925B. This makes it possible to limit the increase in temperature of the liquid crystal modulation elements 925R, 925G, and 925B, and to prevent the deterioration of the optical properties thereof.

Furthermore, since the liquid crystal modulation

elements 925R, 925G, and 925B and the outgoing-side  
polarizers 961R, 961G, and 961B are apart from each other,  
the light emitted from the liquid crystal modulation  
elements 925R, 925G, and 925B widely spread, and the  
5 polarizers 961R, 961G, and 961B can receive the light in a  
wide area. As a result, it is possible to decrease the heat  
generated by the polarizers 961R, 961G, and 961B per unit  
area, and to permit easy heat radiation. In particular, it  
is effective to place a microlens array, which gathers light  
10 onto each pixel of the light valve, on the light incident  
side of each of the liquid crystal modulation elements 925R,  
925G, and 925B because the light can spread more widely.

Inside the projection display device 1 of this  
embodiment, an air flow is formed as shown by the arrow in  
15 FIG. 6(B). Accordingly, if the light outgoing surfaces  
9252R, 9252G, and 9252B of the liquid crystal modulation  
elements 925R, 925G, and 925B are exposed, they are soiled  
by the dust that is diffused by the air flow and adheres  
thereto. In the projection display device 1 of this  
20 embodiment, however, since the transparent plates 970R,  
970G, and 970B are bonded to the light outgoing surfaces  
9252R, 9252G, and 9252B of the liquid crystal modulation  
elements 925R, and 925G, and 925B, the negative effects  
mentioned above can be avoided.

25 It is preferable to set the thickness of the

transparent plates 970R, 970G, and 970B sufficiently large with respect to the focal depth of the projection lens. This is because dust or the like is thereby blurred and made inconspicuous even when it adheres to the surface of the

5 transparent plates 970R, 970G, or 970B.

Furthermore, since the optical axes of the transparent plates 970R, 970G, and 970B almost align with those of the outgoing-side polarizers 961R, 961G, and 961B in the projection display device 1 of this embodiment, it is

10 possible to prevent image degradation resulting from the anisotropy that the liquid crystal modulation elements 925R, 925G, and 925B possess.

Still furthermore, since the transparent plates 970R, 970G, and 970B are made of the same material as that of the substrates for sandwiching the polarizing layer of the

15 polarizers 961R, 961G, and 961B, the number of types of components can be reduced. Moreover, since the substrates for sandwiching the polarizing layer are bonded to the liquid crystal modulation element, they cause few defects.

20 Therefore, image degradation due to the defects of the transparent plate can be naturally prevented by making the transparent plate of the same material as that of the substrates for sandwiching the polarizing layer.

Yet furthermore, the transparent plates 970R, 970G, and

25 970B mentioned above may be formed on the light incident

surfaces of the liquid crystal modulation elements 925R, 925G, and 925B. In this case, even if dust or the like adheres to the light incident surface of the liquid crystal modulation element, it is inconspicuous on the screen.

5 Moreover, the transparent plates 970R, 970G, and 970B may be formed on both the light incident and outgoing surfaces of the liquid crystal modulation elements 925R, 925G, and 925B.

Yet still furthermore, the surfaces of such transparent plates 970R, 970G, and 970B may be coated with a surface  
10 active agent(interfacial active agent), or treated for electrostatic protection. Since this makes it difficult for dust to adhere to the surfaces of the transparent plates 970R, 970G, and 970B, the adhesion of dust can be prevented more effectively.

15 In addition, polarizers 961R, 961G, and 961B may be bonded to the transparent plates 970R, 970G, and 970B. In this case, it is possible to prevent dust from entering between the liquid crystal modulation elements 925R, 925G, and 925B and the polarizers 961R, 961G, and 961B, and to  
20 thereby prevent the polarization condition of light from being disturbed by dust. Moreover, when a black image is displayed, its portion corresponding to the adhering dust can be prevented from being displayed as a white blank, and display quality can be improved.

25 The polarizers include two types of polarizers, a

reflective polarizer and an absorptive polarizer. The reflective polarizer transmits one of two types of linearly polarized light fluxes, and reflects the other linearly polarized light flux. The absorptive polarizer transmits one of two types of linearly polarized light fluxes, and absorbs the other linearly polarized light flux. The polarizers 960R, 960G, 960B, 961R, 961G, and 961B may be either reflective or transmissive.

The outgoing-side polarizers 961R, 961G, and 961B may be independently placed between the liquid crystal modulation elements 925R, 925G, and 925B and the color synchronizing prism 910 without being bonded to the color synthesizing prism 910.

<Second Embodiment>

FIG. 8 schematically shows the construction of the surroundings of liquid crystal modulation elements in a projection display device according to a second embodiment of the present invention. Since the projection display device of this embodiment has a similar construction to that of the projection display device 1 except that the surroundings of the liquid crystal modulation elements are different, a description will only be given of different points. In FIG. 8, the components common to those of the projection display device 1 are denoted by the same numerals, and the description thereof is omitted.

As shown in FIG. 8, in the projection display device of this embodiment, three liquid crystal modulation elements 925R, 925G, and 925B and a color synthesizing prism 910 are completely enclosed by a partition 983 that tightly  
5 surrounds the liquid crystal modulation elements 925R, 925G, and 925B via air. Inside the partition 983, a fan 987 is located to circulate air. In this embodiment, an air flow 985 is formed inside the partition 983 by the fan 987, as shown by the arrows in FIGS. 12(A) and 12(B).

10 The partition 983 has light incident windows at the positions opposing light incident surfaces 9251R, 9251G, and 9251B of the three liquid crystal modulation elements 925R, 925G, and 925B. The light incident windows are provided with transparent plates 980R, 980G, and 980B made of glass  
15 or the like. Moreover, the partition 983 also has a light outgoing window 990 formed of an opening that faces the light outgoing surfaces of the color synthesizing prism 910. Therefore, respective color light fluxes R, G, and B pass through the transparent plates 980R, 980G, and 980B, and  
20 enter the corresponding liquid crystal modulation elements 925R, 925G, and 925B. The color light fluxes R, G, and B are modulated by the liquid crystal modulation elements 925R, 925G, and 925B, synthesized by the color synthesizing prism 910, and then, emerge from the light outgoing window  
25 990 toward the projection lens unit 6.

Incident-side polarizers 960R, 960G, and 960B are bonded to the outsides of the transparent plates 980R, 980G, and 980B, and a common outgoing-side polarizer 982 is fitted in the light outgoing window 990. That is, the outgoing-  
5 side polarizer 982 is positioned apart from light outgoing surfaces 9252R, 9252G, and 9252B of the liquid crystal modulation elements 925R, 925G, and 925B.

In the projection display device of this embodiment that has the above-mentioned construction, the heat  
10 generated by the liquid crystal modulation elements 925R, 925G, and 925B is absorbed by the partition 983 by means of the air flow 985 formed by the fan 987, and then, is radiated to the outside from the partition 983. The heat radiated from the partition 983 and the heat generated by  
15 the incident-side polarizers 960R, 960G, and 960B, and the outgoing-side polarizer 982 are removed by an air flow formed inside the device by the suction fan 15A and the exhaust fan 16 shown in FIGS. 2 and 3.

Therefore, it is possible to limit the increase in  
20 temperature of the liquid crystal modulation elements 925R, 925G, and 925B and the incident- and outgoing-side polarizers 960R, 960G, 960B, and 982, and to prevent deterioration of the optical properties. Moreover, since the liquid crystal modulation elements 925R, 925G, and 925B  
25 are completely enclosed by the partition 983, dust, fuzz or



the like does not enter the inside of the partition 983 from the outside. This makes it possible to prevent image degradation caused by, for example, dust or the like projected on the screen that gives an unsightly appearance.

5 As the material of the partition 983, it is preferable to use a metal having a high heat absorbency, such as magnesium or aluminum.

Furthermore, since the liquid crystal modulation elements 925R, 925G, and 925B and the outgoing-side  
10 polarizer 982 are apart from each other, the light emitted from the liquid crystal modulation elements 925R, 925G, and 925B widely spread, and the polarizer 982 can receive the light in a wide area. As a result, it is possible to decrease the heat generated by the polarizer 982 per unit  
15 area, and to permit easy heat radiation. In particular, it is effective to place a microlens array, which gathers light onto each pixel of the light valve, on the light incident side of each of the liquid crystal modulation elements 925R, 925G, and 925B because the light can spread more widely.

20 Such transparent plates 980R, 980G, and 980B may be coated with a surface active agent(interfacial active agent), or treated for electrostatic protection. In this case, since it is difficult for dust to adhere thereto, it is possible to prevent the dust adhesion more effectively.

25 The polarizers include two types of polarizers, a

reflective polarizer and an absorptive polarizer. The reflective polarizer transmits one of two types of linearly polarized light fluxes, and reflects the other linearly polarized light flux. The absorptive polarizer transmits one of two types of linearly polarized light fluxes, and absorbs the other linearly polarized light flux. The polarizers 960R, 960G, 960B, and 982 may be either reflective or transmissive.

<Third Embodiment>

While the projection display devices using transmissive liquid crystal modulation elements as the liquid crystal modulation elements have been described in the first and second embodiments, the present invention can be applied to a projection display device that uses a reflective liquid crystal modulation element as the liquid crystal modulation element. An example of a projection display device using a reflective liquid crystal modulation element will be described below.

FIG. 9 is a schematic structural view showing the surroundings of light valves in the projection display device of this embodiment. In FIG. 9, a polarization beam splitter 1900 is formed of a prism having an s-polarized light flux reflecting plane 1901 that reflects an s-polarized light flux and transmits a p-polarized light flux. The polarization beam splitter 1900 bends an s-polarized

light component of illumination light, which is emitted from the light source lamp unit 8, into an angle of  $90^\circ$  by the s-polarized light flux reflecting plane 1901, and causes the s-polarized light component to enter a dichroic prism 1910 that functions as color separation means and color synthesizing means.

The dichroic prism 1910 includes dichroic films bonded in the form of an X, and separates incident illumination light into three color light fluxes R, G, and B. The respective color light fluxes separated by the dichroic prism 1910 enter light incident and outgoing surfaces of reflective liquid crystal modulation elements 1925R, 1925G, and 1925B that are placed along three sides of the dichroic prism 1910. The respective color light fluxes incident on the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B are modulated therein, and emitted from the same light incident and outgoing surfaces to the dichroic prism 1910.

The reflective liquid crystal modulation elements 1925R, 1925G, and 1925B of this embodiment are of the super homeotropic alignment type in which liquid crystal molecules vertically align when voltage is not applied (off), and they are twisted through  $90^\circ$  when voltage is applied (on). Accordingly, the s-polarized light fluxes incident on the reflective liquid crystal modulation elements 1925R, 1925G,

and 1925B when voltage is not applied (off) are returned to the dichroic prism 1910 without changing their polarization direction.

On the other hand, the s-polarized light fluxes incident on the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B when voltage is applied (on) are turned into p-polarized light fluxes with their polarization direction changed by the twisting of the liquid crystal molecules, and then, returned to the dichroic prism 1910.

The light fluxes modulated by the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B are synthesized by the dichroic prism 1910, and projected onto a projection plane (screen) via the polarization beam splitter 1900, a polarizer 1920, and the projection lens unit 6.

In the projection display device using such reflective liquid crystal modulation elements 1925R, 1925G, and 1925B, transparent plates 1970R, 1970G, and 1970B, which are similar to those mentioned in the first embodiment, are bonded to the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B, respectively. Therefore, it is possible to prevent the light reflection at the interfaces between the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B

and air because of the difference in refractive index therebetween. This can improve the light utilizing efficiency.

Even if dust or the like is diffused by an air flow  
5 formed inside the device, dust is prevented by the transparent plates 1970R, 1970G, and 1970B from directly adhering to the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B. Therefore, in the projection display device of  
10 this embodiment that uses the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B as the liquid crystal modulation elements, high-quality image projection can be achieved by preventing dust from adhering to the light incident and outgoing surfaces of the liquid crystal  
15 modulation elements 1925R, 1925G, and 1925B without deteriorating the switching characteristic of the liquid crystal modulation elements 1925R, 1925G, and 1925B.

The surfaces of such transparent plates 1970R, 1970G, and 1970B may be coated with a surface active  
20 agent(interfacial active agent), or treated for electrostatic protection. Since this makes it difficult for dust to adhere to the surfaces of the transparent plates 1970R, 1970G, and 1970B, the adhesion of dust can be prevented more effectively.

25 The polarizer 1920 placed between the polarization beam

splitter 1900 and the projection lens unit 6 operates to improve the contrast of a projected image. Therefore, this polarizer 1920 may be omitted in a case in which a projected image is not required to have high contrast.

5       The polarizers include two types of polarizers, a reflective polarizer and an absorptive polarizer. The reflective polarizer transmits one of two types of linearly polarized light fluxes, and reflects the other linearly polarized light flux. The absorptive polarizer transmits  
10 one of two types of linearly polarized light fluxes, and absorbs the other linearly polarized light flux. The polarizer 1920 may be either reflective or transmissive.

While the transparent plates 1970R, 1970G, 1970B are bonded to the light incident and outgoing surfaces of the  
15 reflective liquid crystal modulation elements 1925R, 1925G, and 1925B in the above embodiment, the reflective liquid crystal modulation elements 1925R, 1925G, and 1925B and the dichroic prism 1910 may be enclosed by a partition as described in the third embodiment.

20   <Fourth Embodiment>

Next, a description will be given of another example of a projection display device that adopts reflective liquid crystal modulation elements.

FIG. 10 is a schematic structural view showing the  
25 surroundings of light valves in the projection display

device of this embodiment. In FIG. 10, the projection display device includes a blue reflecting dichroic mirror 2941 and a red-green reflecting dichroic mirror 2942 that reflect illumination light emitted from the light source lamp unit 8. A blue light flux B contained in a light flux W is reflected at right angles by the blue reflecting dichroic mirror 2941, is further reflected at right angles by a reflecting mirror 2971, and enters a first polarization beam splitter 2900B located next to a dichroic prism 2910.

This polarization beam splitter 2900B is formed of a prism having an s-polarized light flux reflecting plane 2901B that is made of a polarized light separation film for reflecting an s-polarized light flux and transmitting a p-polarized light flux. The polarization beam splitter 2900B bends an s-polarized light component of the blue light flux into  $90^\circ$  by the s-polarized light flux reflecting plane 2901B, and causes the s-polarized light component to enter a light incident and outgoing surface of a reflective liquid crystal modulation element 2925B that is located opposing one side of the polarization beam splitter 2900B and provided with a transparent plate 2970B on the light incident and outgoing surface. Then, only a p-polarized light of the blue light flux, which is modulated by the liquid crystal modulation element 2925B and transmitted through the s-polarized light flux reflecting plane 2901B,

emerges from the same light incident and outgoing surfaces to the dichroic prism 2910.

On the other hand, a red light flux R and a green light flux G are first reflected at right angles by the red-green reflecting dichroic mirror 2942, and further reflected at right angles by a reflecting mirror 2972.

After passing through a green reflecting dichroic mirror 2941, the red light flux R enters a second polarization beam splitter 2900R that is located on an opposite side to the first polarization beam splitter 2900B across the dichroic prism 2910. The second polarization beam splitter 2900R is formed of a prism having an s-polarized light flux reflecting plane 2901B that is made of a polarized light separation film for reflecting an s-polarized light flux and transmitting a p-polarized light flux.

The second polarization beam splitter 2900R bends the s-polarized light component of the red light flux into  $90^\circ$  by the s-polarized light flux reflecting plane 2901R, and causes the s-polarized light component to enter a light incident and outgoing surface of a reflective liquid crystal modulation element 2925R that is located opposing one side of the polarization beam splitter 2900R and provided with a transparent plate 2970R on the light incident and outgoing surface. Only p-polarized light of the red light flux,



which is modulated by the liquid crystal modulation element 2925R and transmitted through the s-polarized light flux reflecting plane 2901R, emerges from the same light incident and outgoing surface to the dichroic prism 2910.

5       After being reflected by the green reflecting dichroic mirror 2943, the green light flux G enters a third polarization beam splitter 2900G located on one side of the dichroic prism 2910. The third polarization beam splitter 2900G is formed of a prism having an s-polarized light flux  
10   reflecting plane 2901G made of a polarized light separation film that reflects an s-polarized light flux and transmits a p-polarized light flux. This polarization beam splitter 2900G bends an s-polarized light component of the green light flux G into 90° by the s-polarized light flux  
15   reflecting plane 2901G, and causes the s-polarized light component to enter a light incident and outgoing surface of a reflective liquid crystal modulation element 2925G that is located opposing one side of the polarization beam splitter 2900G and provided with a transparent plate 2970G on the  
20   light incident and outgoing surfaces.

Then, only p-polarized light of the green light flux, which is modulated by the liquid crystal modulation element 2925G and transmitted through the s-polarized light flux reflecting plane 2901G, emerges from the same light incident  
25   and outgoing surfaces to the dichroic prism 2910.

As mentioned above, the respective light fluxes B, G, and R modulated through the liquid crystal modulation elements 2925B, 2925R, and 2925G enter the dichroic prism 2910, where they are synthesized. The synthesized color  
5 image is magnified and projected via the projection lens unit 6 onto a screen 10 that is placed at a predetermined position.

In the projection display device using such reflective liquid crystal modulation elements 2925R, 2925G, and 2925B,  
10 the transparent plates 2970R, 2970G, and 2970B, which are similar to the transparent plates mentioned in the above first embodiment, are bonded to the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B, respectively.  
15 Therefore, it is possible to prevent the light reflection at the interfaces between the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B and air because of the difference in refractive index therebetween, and to thereby  
20 improve the light utilizing efficiency.

Even if dust or the like is diffused by an air flow formed inside the device, dust is prevented by the transparent plates 2970R, 2970G, and 2970B from directly adhering to the light incident and outgoing surfaces of the  
25 reflective liquid crystal modulation elements 2925R, 2925G,

and 2925B. Therefore, in the projection display device of this embodiment that uses the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B as the liquid crystal modulation elements, the switching characteristic of the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B is not deteriorated, and the dust is prevented from adhering to the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B, whereby a high-quality image can be projected.

The surfaces of such transparent plates 2970R, 2970G, and 2970B may be coated with a surface active agent(interfacial active agent), or treated for electrostatic protection. Since this makes it difficult for dust to adhere to the surfaces of the transparent plates 2970R, 2970G, and 2970B, the adhesion of dust can be prevented more effectively.

While the transparent plates 2970R, 2970G, and 2970B are bonded to the light incident and outgoing surfaces of the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B in the above embodiment, the reflective liquid crystal modulation elements 2925R, 2925G, and 2925B and the dichroic prism 2910 may be enclosed by a partition as mentioned in the third embodiment.

<Other Embodiments>

While the projection display device having three liquid crystal modulation elements for modulating three colored lights, respectively, is described in the above first embodiment, a projection display device to which the present invention applies is not limited to the above-mentioned device, for example, it may use only a single liquid crystal modulation element. Moreover, the projection display devices are divided into two types, a front type that performs projection from the side on which the screen is viewed, and a rear type that performs projection from the side opposite to the screen viewing side, and the present invention is applicable to either of the types.

#### Industrial Applicability

The present invention can be used as a projection display device that optically processes a light flux emitted from a light source and magnifies and projects an image onto a projection plane, such as a video projector having liquid crystal modulation elements.

CLAIMS

1. An optical modulation element for modulating a light flux emitted from a light source according to image

5 information,

wherein a transparent plate is formed on at least one surface thereof.

2. The optical modulation element according to Claim 1, wherein a polarizer is bonded to said transparent plate.

10 3. The optical modulation element according to Claim 1 or 2,

wherein the surface of said transparent plate is coated with a surface active agent, or treated for electrostatic protection.

15 4. A projection display device having an optical modulation element for modulating a light flux emitted from a light source according to image information, and projection means for magnifying and projecting the light flux modulated by said optical modulation element onto a  
20 projection plane,

wherein a transparent plate is formed on the light emergent surface of said optical modulation element.

5. The projection display device according to Claim 4, wherein an antireflection film is formed on at least one  
25 surface of said transparent plate.

6. The projection display device according to Claim 4 or 5,

wherein the thickness of said transparent plate is set larger than the focal depth of said projection means.

5 7. The projection display device according to Claim 4 or 5,

wherein a polarizer is interposed between said transparent plate and said projection means, said transparent plate is made of a drawing resin, and the optical axis of said transparent plate almost aligns with the optical axis of said polarizer.

8. The projection display device according to Claim 7,

wherein said polarizer is composed of a polarizing layer and a pair of substrates for sandwiching said polarizing layer, and said transparent plate is made of the same material as that of said substrates.

9. The projection display device according to Claim 7 or 8,

wherein said polarizer is bonded to said transparent plate.

10. The projection display device according to any of Claims 4 to 8,

wherein the surface of said transparent plate is coated with a surface active agent, or treated for electrostatic protection.

11. The projection display device according to any of  
Claims 4 to 10,

wherein said optical modulation element is mounted via a  
mounting member on a color synthesizing prism for forming  
5 said projection means, said mounting member includes a  
mounting frame plate composed of first and second frame  
members for sandwiching said optical modulation element, a  
fixed frame plate to be in a fixed contact with the light  
incident surface of said color synthesizing prism, and an  
10 intermediate frame plate to be sandwiched between said  
mounting frame plate and said fixed frame plate.

12. The projection display device according to Claim 11,  
wherein said mounting frame plate is made of a resin  
containing glass fiber.

13. The projection display device according to Claim 11,  
wherein said mounting frame plate is made of metal.

14. A projection display device having an optical  
modulation element for modulating a light flux emitted from  
a light source according to image information, and

20 projection means for magnifying and projecting the light  
flux modulated by said optical modulation element onto a  
projection plane, said projection display device comprising:

a partition for surrounding said optical modulation  
element via an air layer and thereby separating said optical  
25 modulation element from said light source and said

projection means,

said partition having a transparent plate fitted in a light incident window corresponding to the light incident surface of said optical modulation element, and a light  
5 outgoing window for emitting the light flux modulated by said optical modulation element therefrom.

15. The projection display device according to Claim 14,

wherein a fan for circulating air is located inside said partition.

10 16. The projection display device according to Claim 14 or 15,

wherein said polarizer is bonded to said transparent plate.

17. The projection display device according to Claim 14 or  
15 15,

wherein the surface of said transparent plate is coated with a surface active agent, or treated for electrostatic protection.




ABSTRACT

Liquid crystal modulation elements (optical modulation elements) are placed so that light outgoing surfaces thereof face light incident surfaces of a color synthesizing prism, respectively. Transparent plates are bonded to the light outgoing surfaces of the liquid crystal modulation elements. Therefore, it is possible to prevent dust from adhering to the light outgoing surfaces of the liquid crystal modulation elements. Furthermore, it is possible to prevent light reflection at the interface surface between the light outgoing surfaces and air because of the difference in refractive index therebetween. This permits the projection of a high-quality image without deteriorating the switching characteristic of the liquid crystal modulation elements while preventing dust from adhering to the light outgoing surfaces of the liquid crystal modulation elements.

1/10

FIG. 1

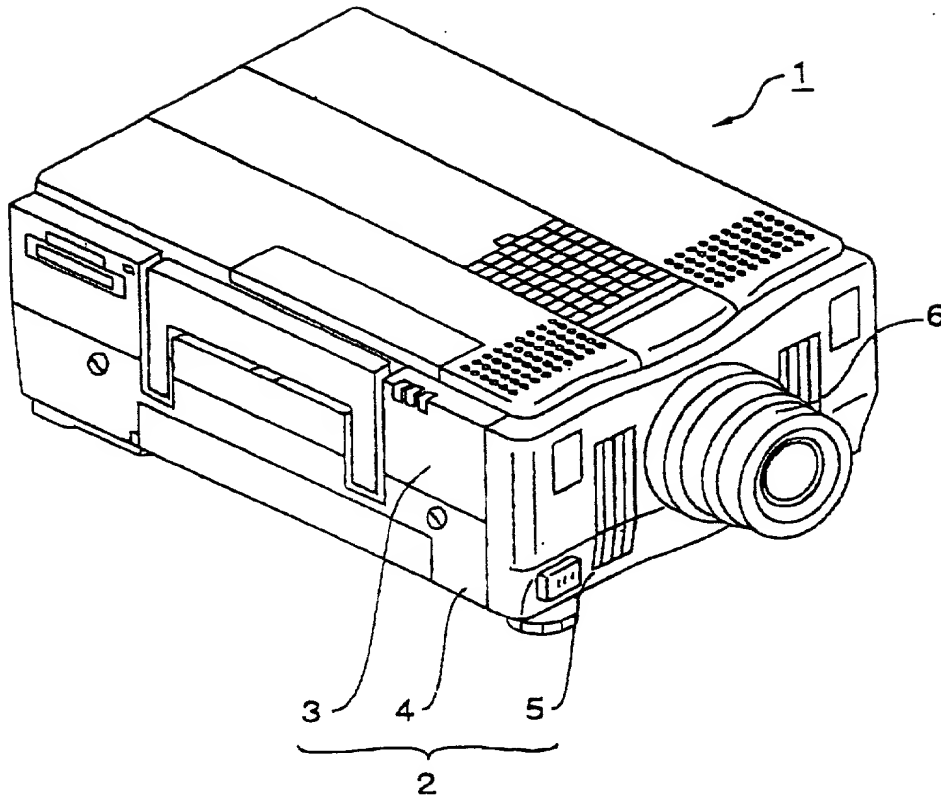

2/10

FIG. 2


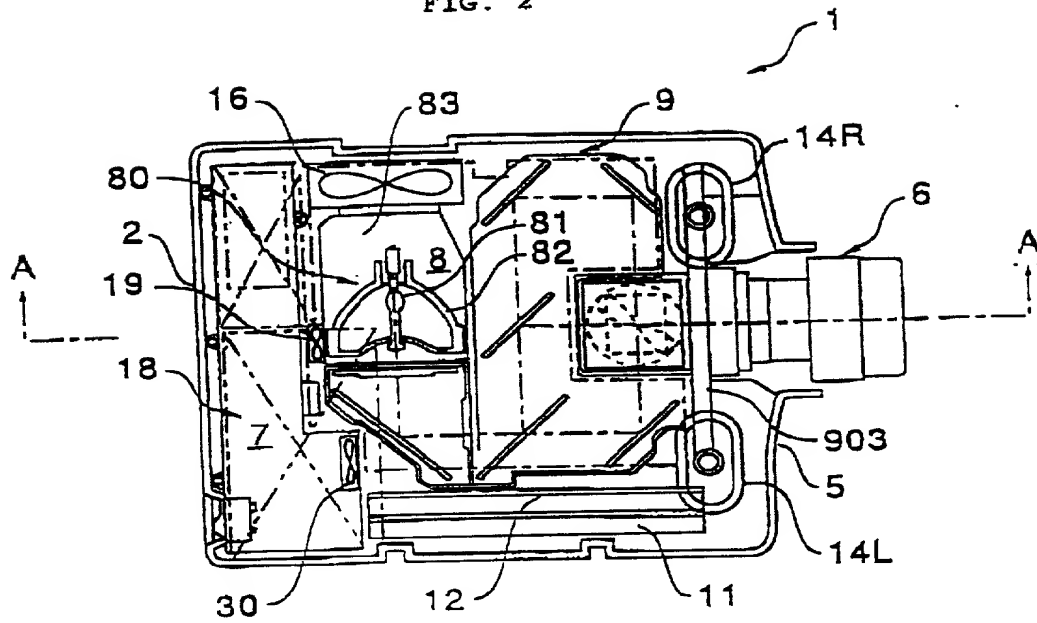



FIG. 3

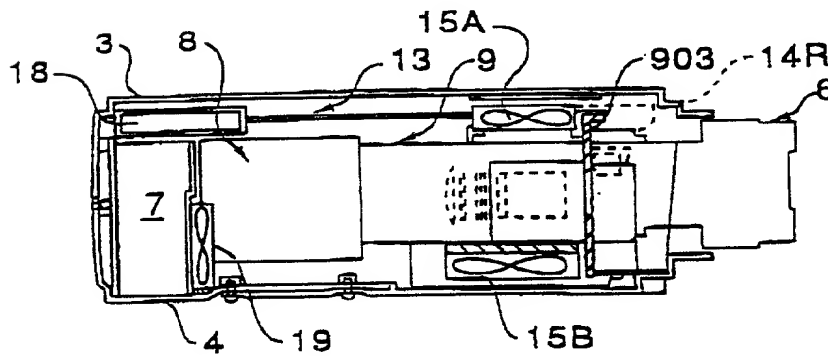


(CROSS SECTION TAKEN ALONG A-A)

3/10

FIG. 4

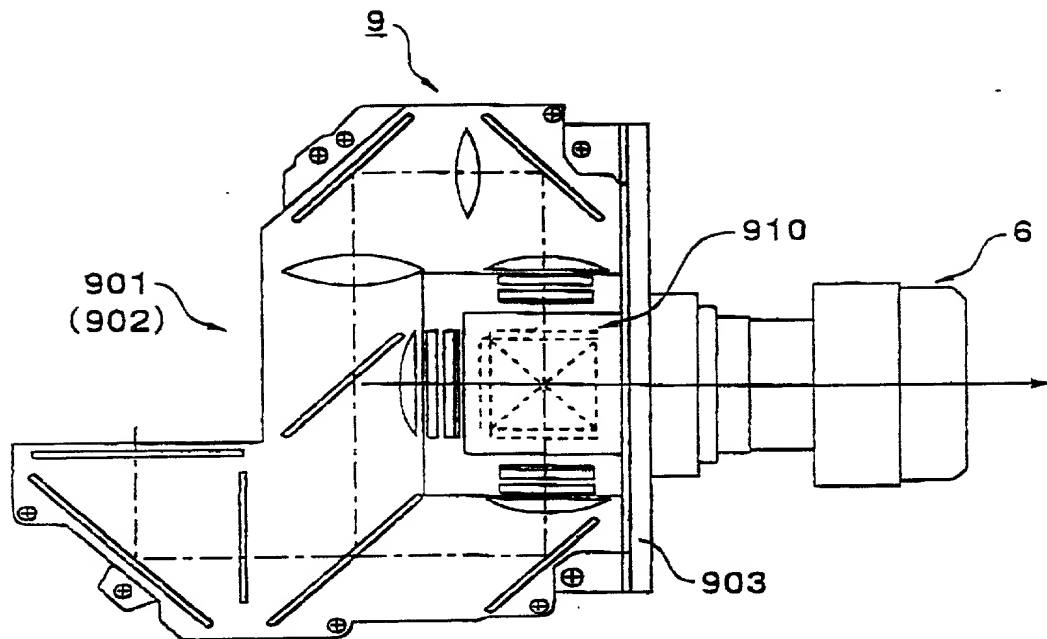


**FIG. 5**

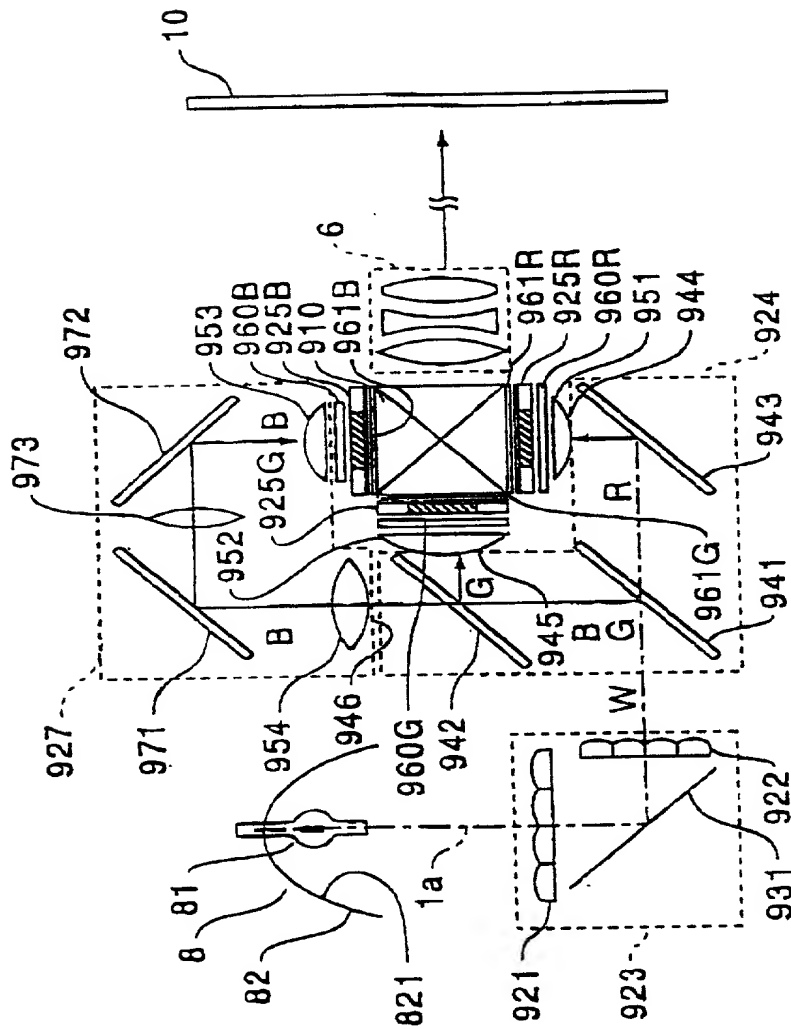


5/10

FIG. 6

(A)

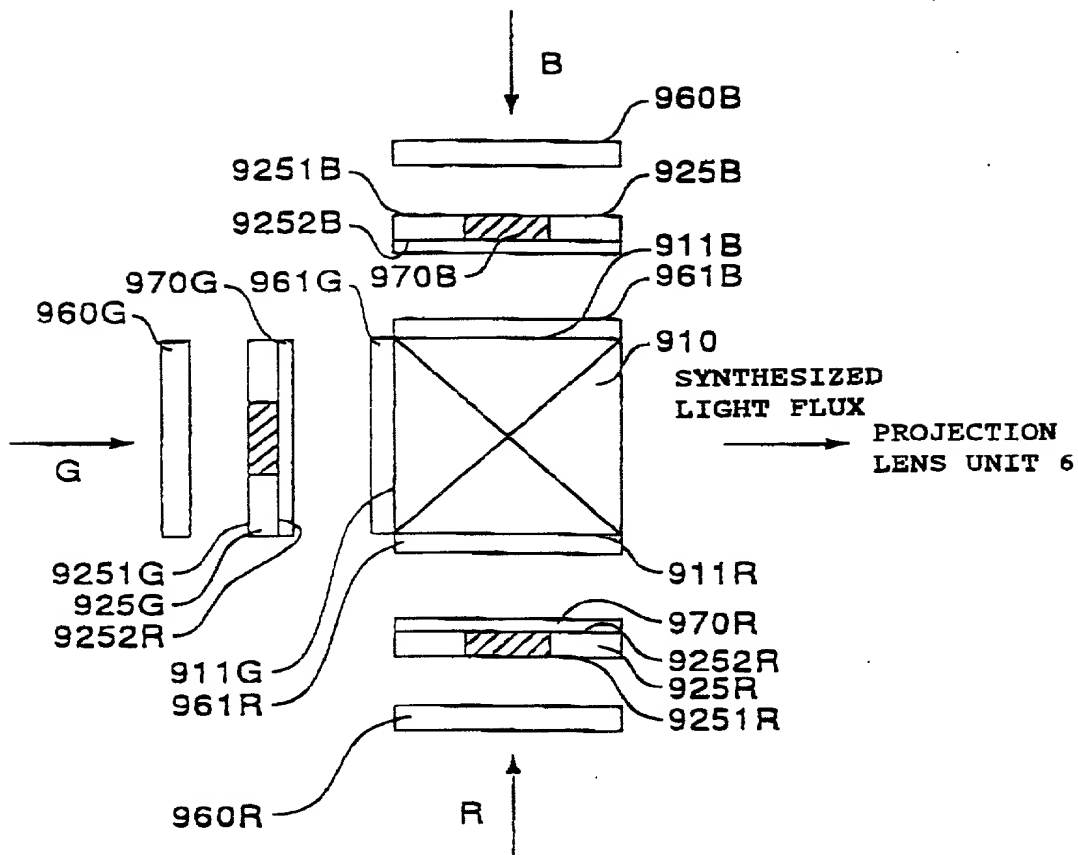

(B)

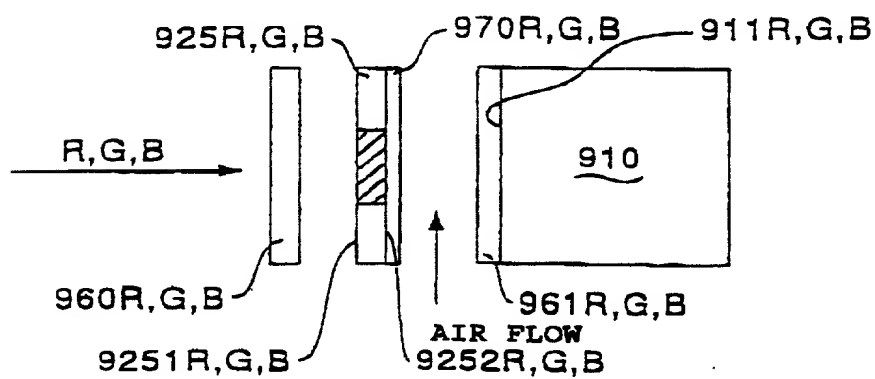





7/10

FIG. 8

(A)

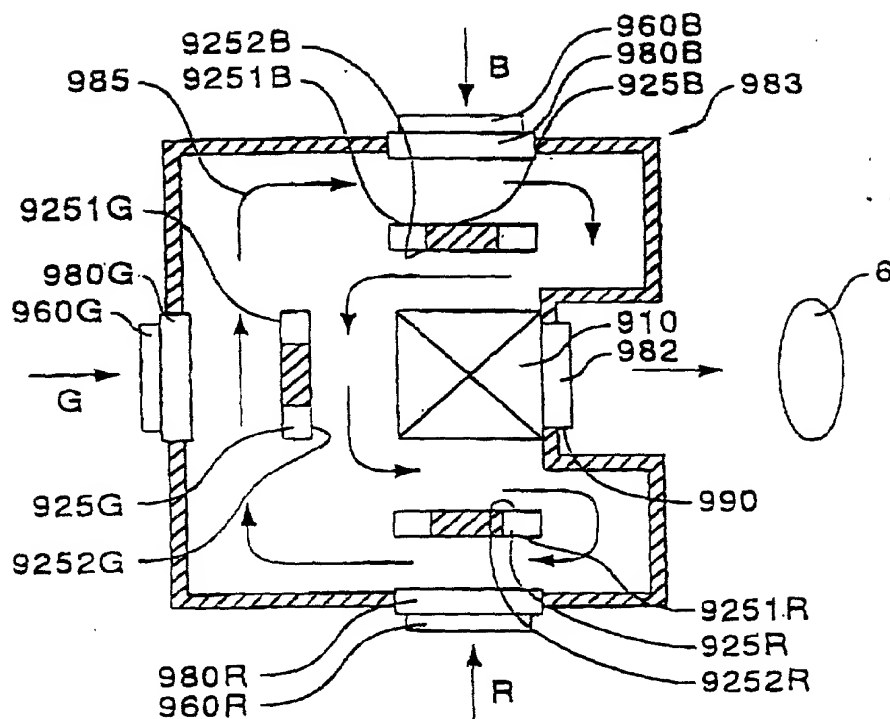


(B)

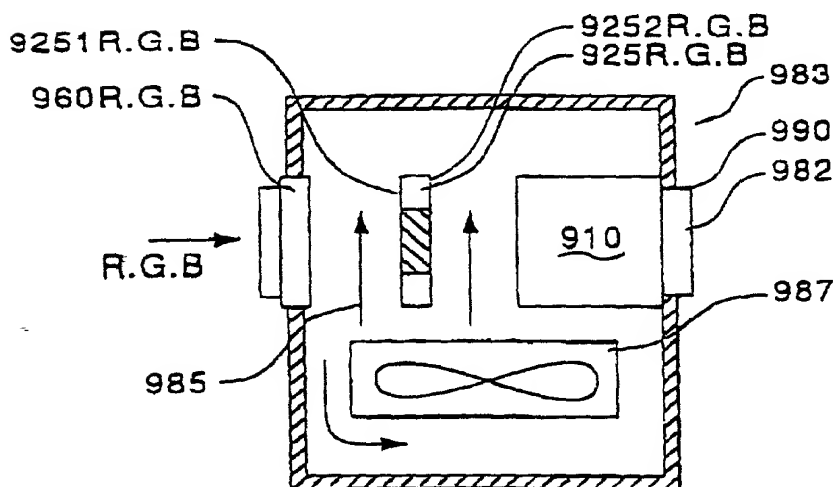




8/10

FIG. 9

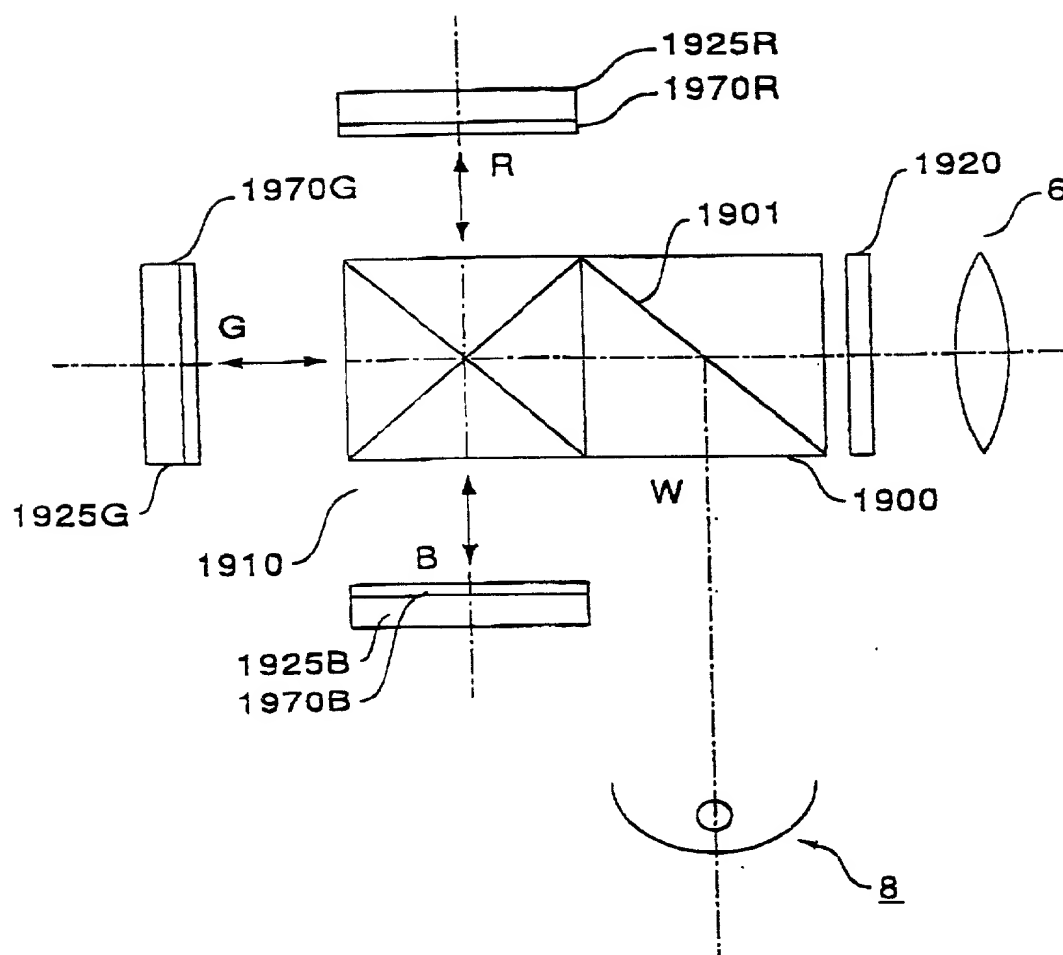


9/10

FIG. 10

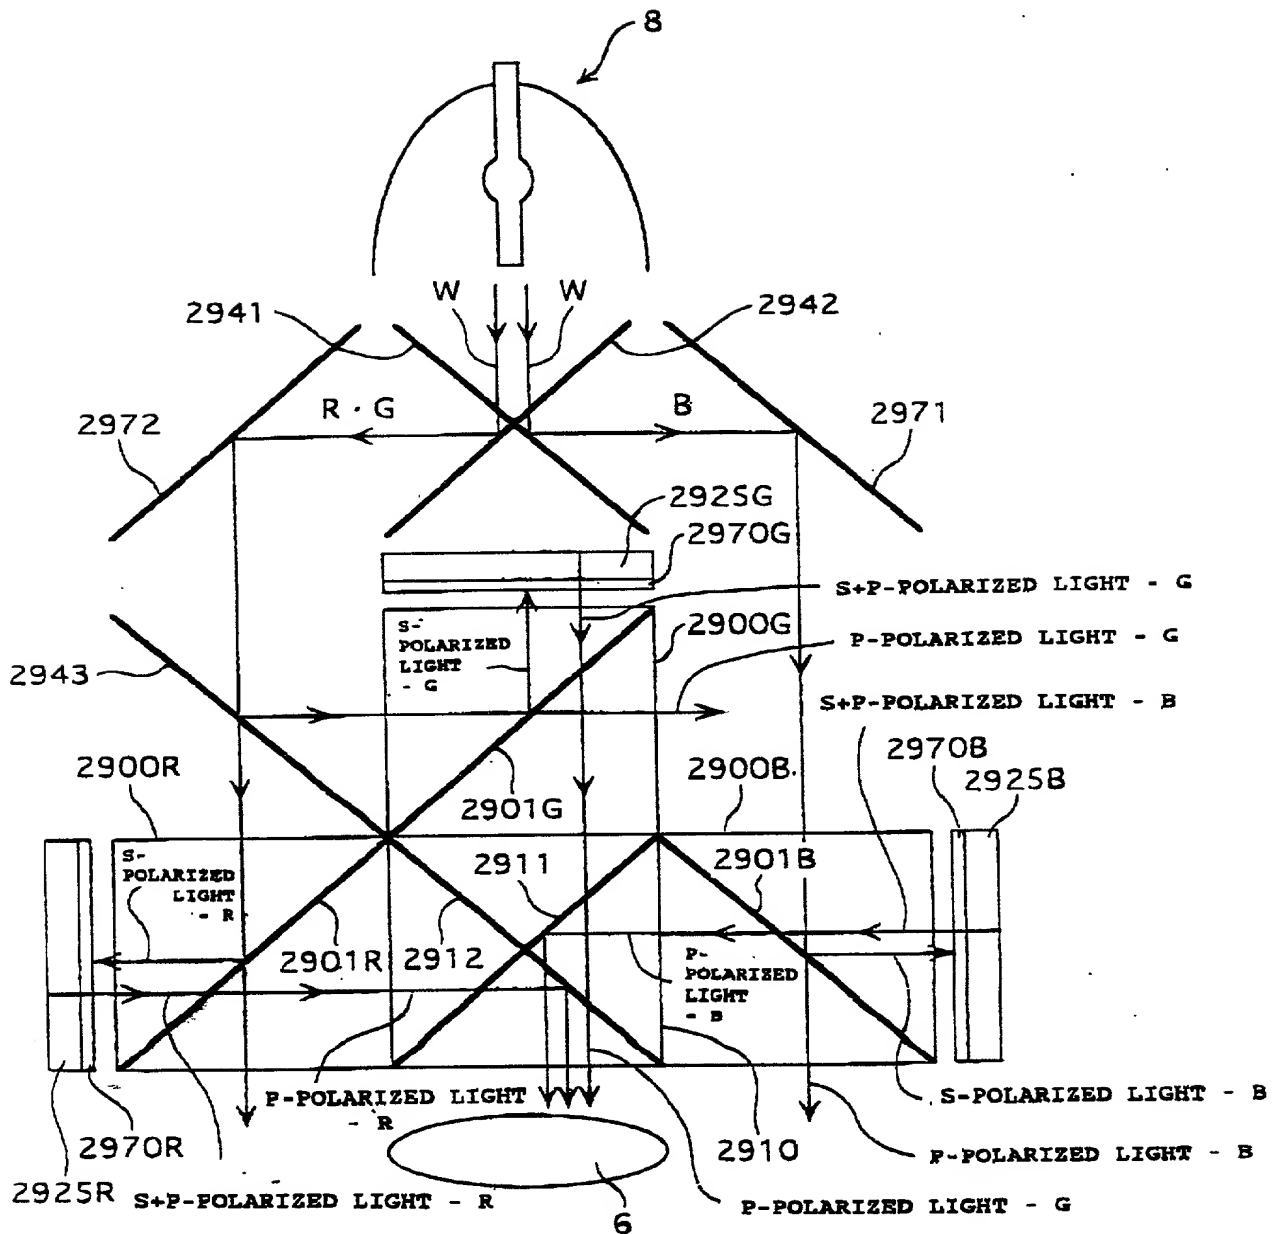


10/10

FIG. 11

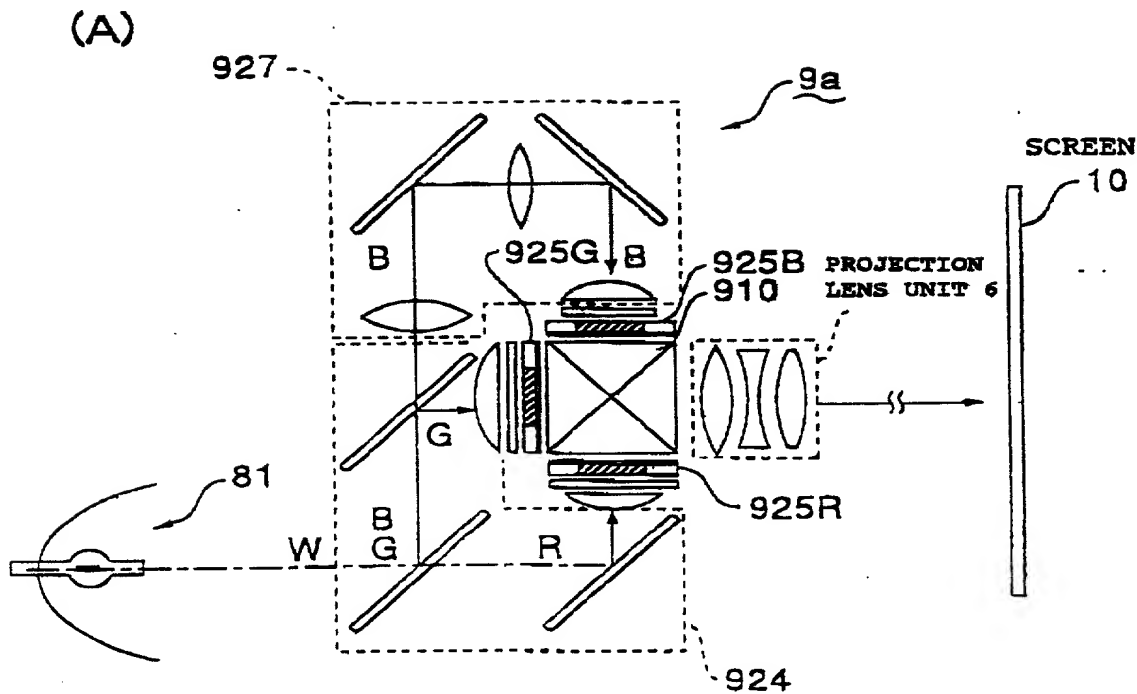

(B)

(C)

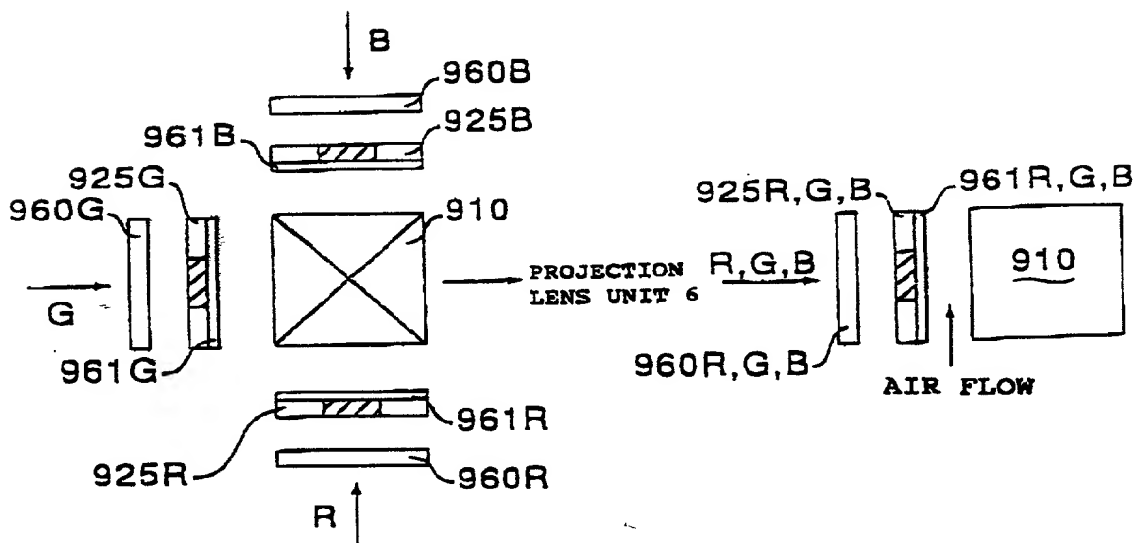

Seiko Epson Ref. No.: FP03286US00

Attorney's Ref. No.: 101850

**Declaration and Power of Attorney For Patent Application**

特許出願宣言書及び委任状

**Japanese Language Declaration**

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は、下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**光変調素子および投写型表示装置****OPTICAL MODULATION ELEMENT AND PROJECTION DISPLAY DEVICE**

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ \_\_\_\_\_に提出され、米国出願番号または特許協定条約 国際出願番号を \_\_\_\_\_ とし、（該当する場合） \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

**Japanese Language Declaration****(日本語宣言書)**

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも1ヶ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

**Prior Foreign Application(s)**

外国での先行出願

**Priority Not Claimed**

優先権主張なし

9-130093(P)Japan20/May/1997☐

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

9-330619(P)Japan1/December/1997☐

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119 (e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1章56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application:

PCT/JP98/02200

(Application No.)

(出願番号)

19/May/1998

(Filing Date)

(出願日)

Pending

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私が入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**

(日本語宣言書)

委任状: 私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

James A. Oliff, (Reg. 27,075)  
 William P. Berridge, (Reg. 30,024)  
 Kirk M. Hudson, (Reg. 27,562)  
 Thomas J. Pardini, (Reg. 30,411)  
 Edward P. Walker, (Reg. 31,450)  
 Robert A. Miller, (Reg. 32,771)  
 Mario A. Costantino, (Reg. 33,565)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, (Reg. 27,075)  
 William P. Berridge, (Reg. 30,024)  
 Kirk M. Hudson, (Reg. 27,562)  
 Thomas J. Pardini, (Reg. 30,411)  
 Edward P. Walker, (Reg. 31,450)  
 Robert A. Miller, (Reg. 32,771)  
 Mario A. Costantino, (Reg. 33,565)

書類送付先:

OLIFF & BERRIDGE, PLC  
 P.O. Box 19928  
 Alexandria, Virginia 22320

Send Correspondence to:

OLIFF & BERRIDGE, PLC  
 P.O. Box 19928  
 Alexandria, Virginia 22320

直接電話連絡先: (名前及び電話番号)

OLIFF & BERRIDGE, PLC  
 (703) 836-6400

Direct Telephone Calls to: (name and telephone number)

OLIFF & BERRIDGE, PLC  
 (703) 836-6400

唯一または第一発明者名

橋爪 俊明

Full name of sole or first inventor

Toshiaki HASHIZUME

発明者の署名

日付

橋爪 俊明

1998年 12月 29日

Inventor's signature

Date

Toshiaki Hashizume

December 29, 1998

住所

日本国, 長野県, 岡谷市

Residence

Okaya-shi, Nagano-ken, Japan JPK

国籍

日本

Citizenship

Japan

私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
 セイコーエプソン株式会社内

Post Office Address

c/o Seiko Epson Corporation  
 3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

第二共同発明者

幅 慎二

Full name of second joint inventor, if any

Shinji HABA

第二共同発明者の署名

日付

幅 慎二

1998年 12月 29日

Second inventor's signature

Date

Shinji Haba

December 29, 1998

住所

日本国, 長野県, 塩尻市

Residence

Shiojiri-shi, Nagano-ken, Japan JPK

国籍

日本

Citizenship

Japan

私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
 セイコーエプソン株式会社内

Post Office Address

c/o Seiko Epson Corporation  
 3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)